

JOINT CUTTERS **SPECIAL**

MULTIFUNCTIONAL DRY CRACK CHASER AND SLOT/CHAMFER CUTTER FS-200-E400

NEW

This new machine combines numerous functions and, thanks to its extensive standard equipment, becomes a universal assistant for every flooring contractor. The cutting shaft and protective blade guard of the FS-200-E400 are designed for direct mounting of the tool packages up to 30 mm width without additional modifications. The special protective blade guard design with sealing brushes guarantees a dust-free construction site!

ONE MACHINE - MANY APPLICATIONS:

SLOTS

cutting (up to 30 mm width and 100 mm depth)

CRACKS

chasing, chamfering, cleaning

EXPANSION JOINTS

chamfering of new joints ,
 repairing and cleaning of old joints

OLD JOINT FILLERS


removing and cutting

FLOOR SLABS


cutting, grooving




Cutting blades





Chamfering tools




Slot cutter



V-crack chaser



Steel brushes

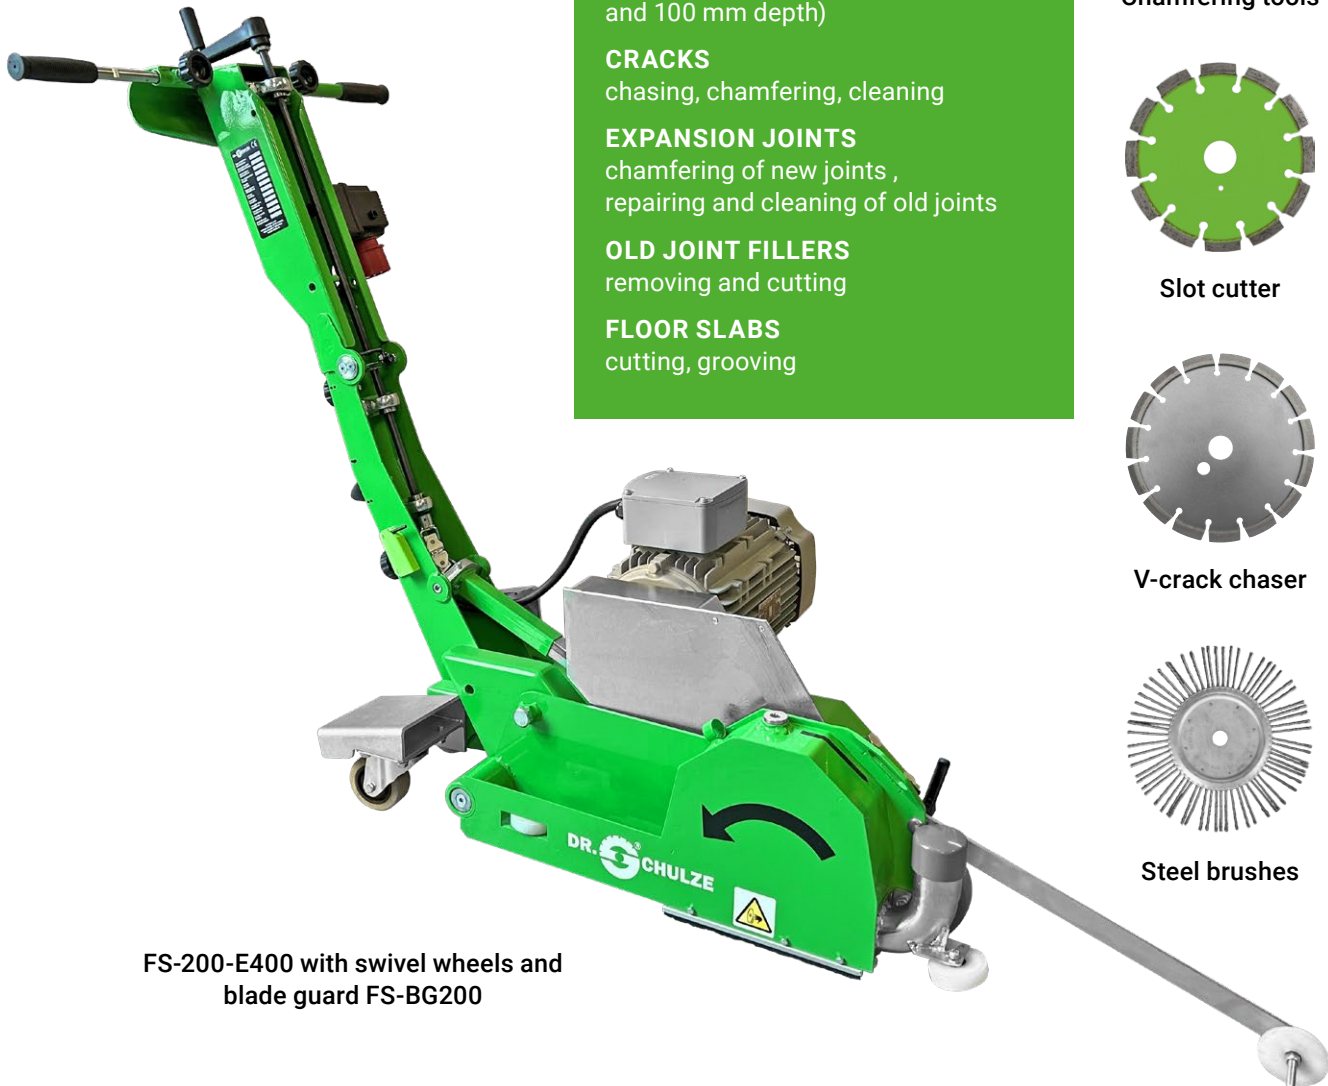

FS-200-E400 with swivel wheels and
 blade guard FS-BG200

TECHNICAL FEATURES

- special design for dust-free dry cutting
- powerful and maintenance-free 4.0 kW three-phase motor with belt drive
- counter-rotating direction of the diamond blade for clean joints after cutting
- possibility of reverse direction of rotation for joint cutting function
- rotatable dust connection for optimal hose routing
- serial possibility to mount tool packages up to 30 mm width
- effortless feed thanks to ergonomic handle and footrests on the (optional) swivel wheels
- handle and fix wheels can be retracted for tight spaces
- easy conversion for cuts close to the wall (approx. 10 mm) thanks to serial flush flange
- protective blade guard with adjustable side rollers for precise cuts close to walls
- cutting line indicator, cutting depth scale, flush cut flange and fixed wheels included
- swivel wheels and protective blade guard for tools Ø300 mm optionally available
- optional set for wet cutting available



FS-200-E400 with swivel wheels, flush cut flange and blade guard FS-BG300



FS-200-E400 in transport position

		FS-200-E400
Ø Tool	[mm]	180 ¹ / 200 ¹ / 300 ²
Bore	[mm]	25,4
Motor		4,0 kW / 16 A / 400 V
Max. cutting depth	[mm]	40 / 50 / 100
Max. cutting width	[mm]	30
Min. distance to the wall	[mm]	10
Length ¹	[mm]	1270
Width ¹	[mm]	612
Height ¹	[mm]	1160
Weight ¹	[kg]	94
Price ¹	[€]	4.290,-
Blade guard FS-BG300 for tools up to Ø300 mm	[€]	790,-
Swivel wheels (set)	[€]	320,-
Set for wet cutting (water tank with holder, hoses, connections)	[€]	290,-

NEW

¹ in standard version with blade guard FS-BG200

² with optional blade guard FS-BG300 (for Ø300 mm)

